

▶ **PT Series — PTM/PTT/PTS**

▶ **What are they?**

Your choice of push-bar control:

- Push-to-Mute (PTM) Disengages (mutes) the transmitter
- Push-to-Talk (PTT) Controls when phone will transmit
- Push-to-Signal (PTS) Initiates radio signal transmission

▶ **What do they do?**

The PTT makes listening easier in environments with intermittent background noise. The PTM is for private outside communication off the phone. The PTS is for radios, FAA, dispatch consoles or where 6-conductor cord is required.

▶ **Features & Benefits**

The PT Series is available in amplified or unamplified handsets. Noise canceling available as an optional feature.



Handset shown:
PTT-500 Series

▶ What are they?


Your choice of push-bar control:

- Push-to-Mute (PTM) Disengages (mutes) the transmitter
- Push-to-Talk (PTT) Controls when phone will transmit
- Push-to-Signa (PTS) Initiates radio signal transmission

▶ What do they do?

The PTT makes listening easier in environments with intermittent background noise. The PTM is for private outside communication off the phone. The PTS is for radios, FAA, dispatch consoles or where 6-conductor cord is required.

The PT Series is available in amplified or unamplified handsets. Noise canceling available as an optional feature.

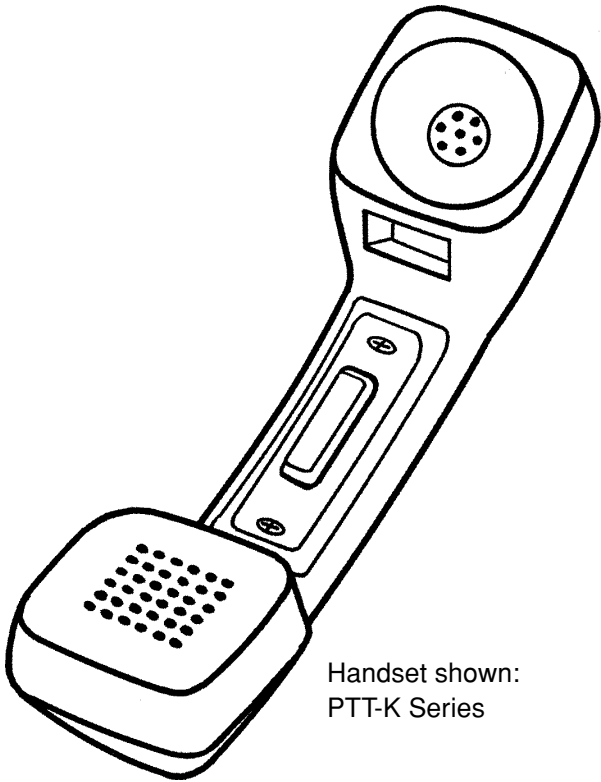

Handset shown:
PTT-K Series

▶ Technical Features

Transmitter Type	Output Level	Output Impedance
Carbon	-20 dBV	20
ET (carbon equivalent)	-23 dBV	20
EM-80	-46 dBV	1000
EM-95	-41 dBV	1000
NC-1	-24 dBV	50
NC-2	-16dBV	50
NC-3	-44 dBV	1.6K
NC-4	-47 dBV	1.6K

Receiver (@ 1000 Hz)	
Output Minimum (-20 dBV drive)	96 dB SPL
Input Impedance	150 Ohm
Amplitude Limiting	124 dB SPL
Receive distortion	less than 5%
Compatible with hearing aids	