
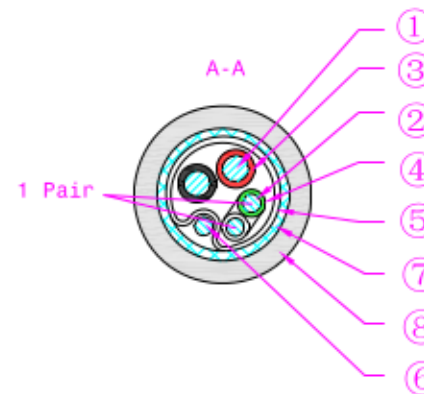


Print Word: E195812 AWM 2725 28AWG/1P AND 24AWG/2C 80 °C 30V
 VW-1 HI-SPEED USB2.0 CCCCC STEREN
 (CCCCC: factory code)

Materials Specifications

No	Qty	Desc	Material	Notes
1	2	Conductor 1	Tinned Copper	24AWG
2	2	Conductor 2	Tinned Copper	28AWG
3	2	Insulator 1	PVC	Black/Red
4	2	Insulator 2	PVC	White/Green,OD:Ø0.84±0.05mm
5	1	Foil Shield	Al	
6	1	Drain Wire	Tinned Copper	
7	1	Braiding	Tinned Copper	
8	1	Jacket	PVC	Pantone:Cool Gray 10C. OD:Ø4.5mm
9	8	Contact		Gold Plated,Solder Type
10	2	Insulator		White
11	4	Shell		Gold Plated
12	2	Molding	PVC	Pantone:Cool Gray 10C.
13	2	Mini Tie	PVC	Pantone:Cool Gray 10C.

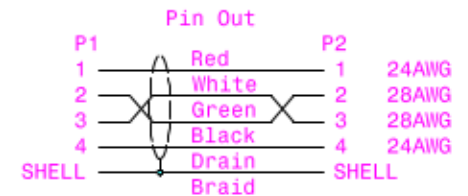

Electrical Test:

- 100% Test(open,short,miss wire)
- Insulation Resistance: 10M ohm min.
- Hi-Pot: DC 300V/10ms.

Product Family

Item	Length	Tolerance±
506-453	3ft	±30
506-456	6ft	±30
506-460	10ft	±50
506-465	15ft	±50

SCALE 1:1 UNITS mm



Steren Electronics International, LLC

6' A-B USB v2.0 Cable

Copyright© 2004 Steren Electronics International, LLC All Right Reserved

506-453

ED

2014-01-03

SHEET NO 1/2